

422k

Skjærfasthet t/m^2


1 2 3 4 5 6 7 8 9

Kote +80


Kote +75

Kote +70

Kote +65

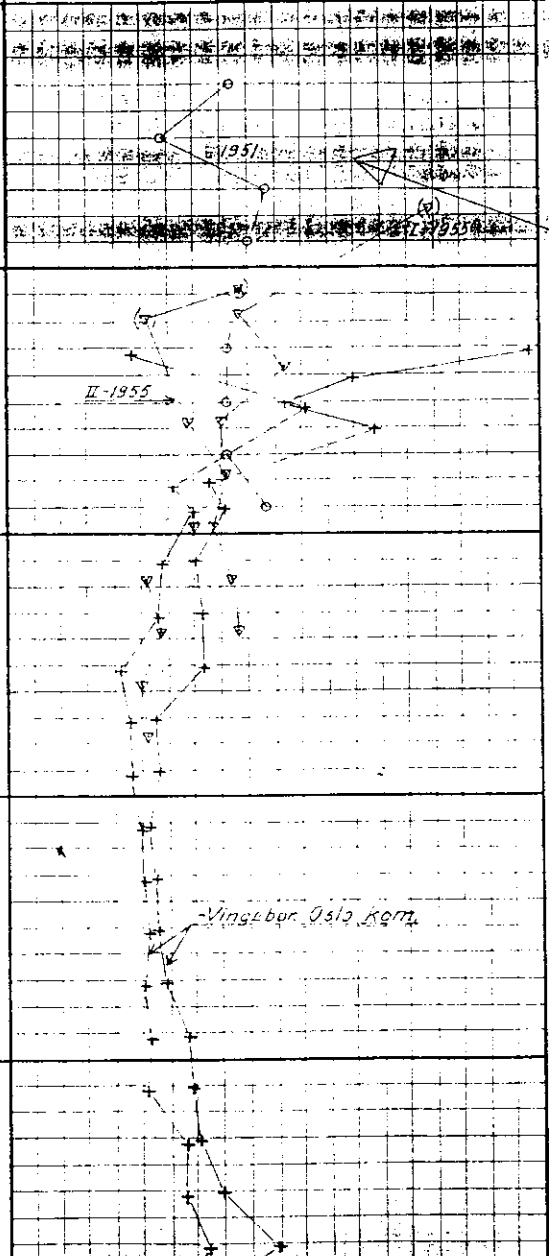

W	V	F	M	K	Y
28,1	46	35	37	42	188
31,5	46,5	40	35	29	194
32,1	47,0	45	62	48	194
35,1	49,5	45	38	45	190
35,2	50,2	46	38	43	189
31,4	46,4	40	35	41	194
33,3	48,2	43	37	41	193
30,4	45,9	37	38	41	187
29,6	45,2	43	74	250	186

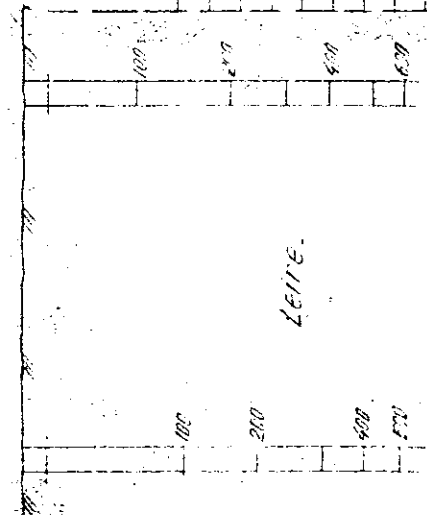

Tegn. nr. G 88-1 (1951)
Alna Chemiske fabrikker
Ing. A. Knoph

NOI2