


So D2  
NSB-2207-12

1974

2098

Situa.

sjon M

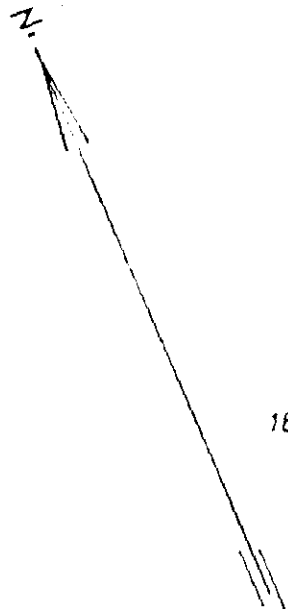

Utvide

lse av

2085

Proveserie VI      Prøvetaker NSB Ø 40 mm

Dybde i m.	Materiale	Pre	Vanninnhold %			n %	γ t/m <sup>3</sup>	Skjærfesthet t/m <sup>2</sup>					S <sub>t</sub>	Q <sub>na</sub>	
			20	40	60			1	2	3	4	5			
1	FYLLMASSE														
2															
3															
4	LEIRE      rottrevler	[diagram]				42	2.0						3	1.2	
5						40	2.0						2	1.1	
6							43	2.0						2	1.1
7							45	2.0						3	1.1

2095

Proveserie VII      Prøvetaker NSB Ø 40 mm

Dybde i m.	Materiale	Pre	Vanninnhold %			n %	γ t/m <sup>3</sup>	Skjærfesthet t/m <sup>2</sup>					S <sub>t</sub>	Q <sub>na</sub>	
			20	40	60			1	2	3	4	5			
1	FYLLMASSE														
2															
3	silt, finsandig siltig	[diagram]				43	1.9						1	1.8	
4						40	2.0						2	1.2	
5			LEIRE				39	2.0						2	1.2
6							45	2.0						2	1.1

Tegn  
Kote  
1 bor  
Loda  
Utvid  
Ledn  
Situa  
Prof  
NO