


So D2
 NSB-2207-12
 1974

2098

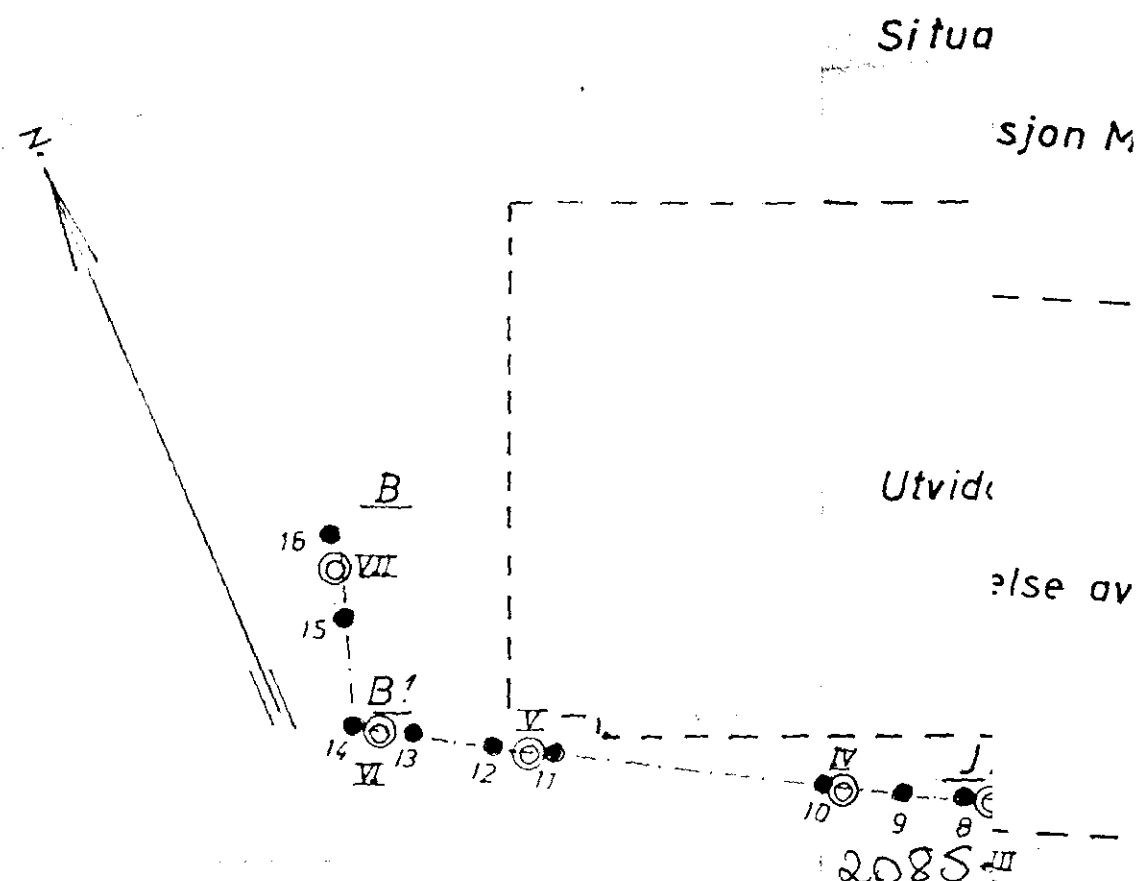

2085

Proveserie VI		Provetaker NSB Ø 40 mm												
Dybde i m.	Materiale	Pre. nr.	Vanninnhold %			n	γ t/m ³	Skjærfesthet t/m ²					s _c	O _{nd}
			20	40	60			1	2	3	4	5		
1	FYLLMASSE													
2														
3														
4	LEIRE rottevrer		○	○		42	2.0					9	3	1.2
5			○	○		40	2.0					5=7.3	2	1.1
6			○	○		43	2.0						2	1.1
7			○	○		45	2.0						3	1.1

2095

Proveserie VII		Provetaker NSB Ø 40 mm												
Dybde i m.	Materiale	Pre. nr.	Vanninnhold %			n	γ t/m ³	Skjærfesthet t/m ²					s _c	O _{nd}
			20	40	60			1	2	3	4	5		
1	FYLLMASSE													
2														
3	LEIRE silt, finsandig siltig		○	○		43	1.9					(9)	1	1.5
4			○	○		40	2.0					5=7.2	2	1.4
5			○	○		39	2.0					5=7.0	2	1.3
6			○	○		45	2.0						2	1.1

Teg
 Kote
 1 bor
 Lode
 Utvide
 Ledn
 Situa
 Prof
 NO